

RAISE YOUR GAME



INTRODUCING

IGNITOR

XTEC
125



SPECIFICATIONS


ENGINE	
Engine Type	Air cooled 4 stroke
Bore & Stroke	52.4 mm x 57.8 mm
Displacement (cm³)	124.7
Compression Ratio	9.1:1
Max Power (BHP/Revolution Per Minute)	10.4 @ 7750
Max Torque (Nm/Revolution Per Minute)	10.4 @ 5500
Fuel System	Carburetor
TRANSMISSION & CHASSIS	
Frame Type	Diamond
Transmission Type	5 Speed
Clutch Type	Wet Multiplate
SUSPENSION	
Front Suspension Type	Telescopic
Rear Suspension Type	5 step Adjustable Hydraulic Shock Absorbers
BRAKES	
Front Brake Type (mm)	Disc - dia 240
Rear Brake Type (mm)	Drum - dia 130
WHEELS & TYRES	
Wheel Type	Alloy
Front Tyre	80/100-18 (Tubeless)
Rear Tyre	100/80-18 (Tubeless)
ELECTRICALS	
Battery (V-Ah)	MF 12V , 4Ah (ETZ 5)
Starting System	Self (with i3s) & Kick
DIMENSIONS	
Overall Length (mm)	2051
Overall Width (mm)	743
Overall Height (mm)	1074
Wheelbase (mm)	1273
Seat Height (mm)	793
Ground Clearance (mm)	180
Fuel Tank Capacity (Litre)	10
Kerb Weight (kg)	115




FUEL SAVING
i3s TECHNOLOGY



FULLY DIGITAL
SPEEDOMETER

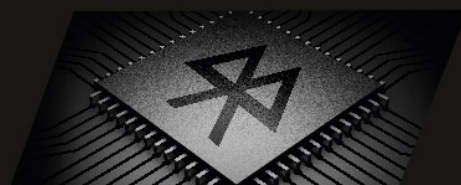

BLUETOOTH
CONNECT

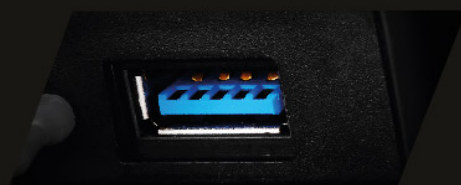

BUILT-IN
MOBILE CHARGER

ATTRACTIVE
COLOURS



MATTE AXIS GREY



BLACK



Candy Blazing Red

Regd. Office: Hero MotoCorp Limited, The Grand Plaza, Plot No.2, Nelson Mandela Road, Vasant Kunj - Phase -II, New Delhi - 110070, India. CIN: L35911DL1984PLC017354. Phone No.: 011 - 46044100. For further information, contact nearest Hero MotoCorp authorised outlet or call our toll free no.: 1800 - 266 - 0018 or visit us on www.heromotocorp.com. Accessories and features shown may not be part of standard fitment. Always wear a helmet while riding a two wheeler.

